

DUHA SERIES GAS FIRED UNIT HEATERS

PRODUCT INFORMATION
GAS UNIT HEATERS



FEATURES/BENEFITS

EFFICIENCY - The DUHA series gas-fired propeller unit heaters deliver 80% thermal efficiency and 78% seasonal efficiency using natural gas or LPG in all models. This excellent efficiency set a new standard for savings when using gas-fired unit heaters.

RELIABILITY - The design of this unit heater has proven itself to be superior during the fourteen years and hundreds of thousands of hours in the toughest winter climates of North America and under extreme conditions in laboratory life cycle testing. The DUHA has been designed to provide long, trouble-free service life.

QUALITY - Every heater undergoes continuous quality checks at all stages of manufacturing. After assembly, each heater is test fired and functionally tested to provide final assurance that it is performing in accordance with Ducane's rigorous quality standards.

APPROVALS — The rating plate of each heater carries the mark signifying that the DUHA heater is designed certified by CSA.

POWER EXHAUST — All heaters have a sealed flue collector and a power exhaust system that enables conventional vertical venting or horizontal venting up to 35 feet. Power exhaust, when used with horizontal venting, lowers operating cost because it reduces stack losses. It also allows the option of not penetrating the roof, or multiple floors. The versatile DUHA series power exhaust reduces installation cost further by allowing the exhaust to be directed upward, left or right, just by rotating the exhaust assembly on certain models.

TUBULAR HEAT EXCHANGERS — Constructed of aluminized steel for superior resistance to corrosion and oxidation. Additional protection is available with an optional stainless steel heat exchanger. The curving design provides for complete exposure of the heating surface to the supply air stream. Rounded surfaces minimize air resistance and permit air to surround all heat transfer surfaces for excellent heat transfer. Tubular design means lighter weight and significantly longer service life due to lower thermal-induced stresses.

Further, the tubular exchangers create less resistance to air flowing through the unit, therefore providing higher airflow and great throw distance of the heated air to the space.

INSHOT BURNERS - These lightweight aluminized steel burners are maintenance-free and never require adjustment. The burning venturi mixes air and gas in the correct proportion for efficient combustion. The entire burner assembly is removable as one piece for ease of service.

DIRECT SPARK IGNITION — In combination with the 24-volt main gas valve with 100% shutoff for safety, the direct spark ignition control provides positive, reliable and safe main burner ignition. This eliminates the need for a pilot light, improving system efficiency and reliability. A separate flame sensor proves main burner ignition. If loss of main burner flame should occur, the control will reinitiate ignition 3 times before locking out for one hour, thus reducing nuisance service calls. The unit will reinitiate ignition after the one hour lockout.

AIR DISTRIBUTION — All models are equipped with efficient, quiet, direct-drive propeller fans, which have been dynamically balanced for quiet, smooth operation. Heated air flows easily through the tubular heat exchangers and is effectively directed to the heated space by means of aerodynamically shaped outlet louvers.

CABINET — Constructed on 18- to 22-gauge cold rolled steel, each cabinet has a pre-painted finish for superior resistance to corrosive elements. Each cabinet has a two-point (3/8 X 16 spotnut) suspension system for easy installation. The two fan models have four-point suspensions. Generous use of inside cabinet insulation keeps the outer surface temperatures low. The wiring junction box is conveniently located on the side of the cabinet for easy access and adequate protection.

WARRANTY — All components have a limited warranty for two full years. The aluminized steel heat exchangers have a limited warranty for ten years. Consult the warranty certificate for details.

DUHA SERIES HEATERS

TECHNICAL DATA


MODEL NUMBER: DUHA-		60	90	115	145	175	200	230	290	345	400
TOTAL INPUT, BTUH*		60,000	90,000	115,000	145,000	172,500	195,000	230,000	287,500	345,000	390,000
TOTAL OUTPUT, BTUH		48,000	72,000	92,000	116,000	138,000	156,000	184,000	230,000	276,000	312,000
AIR VOLUME, CFM		1250	1250	1900	1900	2200	2200	4400	4400	4400	4400
AIR THROW AT 8 FT. MTNG. HEIGHT, FEET		47	47	60	60	65	65	80	80	80	80
RECOMMENDED MAXIMUM MOUNTING HEIGHT, FEET		12	12	16	20	20	20	30	30	30	30
FAN DIAMETER, INCHES/ NUMBER OF FANS		14/1	14/1	16/1	16/1	16/1	16/1	16/2	16/2	16/2	16/2
SHIP WEIGHT, POUNDS		100	115	140	150	165	165	270	285	310	310
NET WEIGHT, POUNDS		85	85	125	130	145	145	225	270	285	285
FAN MOTOR DATA	HORSEPOWER	1/8	1/8	1/8	1/8	1/8	1/8	1/8 (2)	1/8 (2)	1/8 (2)	1/8 (2)
	AMPS @ 115V/1PH/80Hz	2.1	2.1	2.1	2.1	2.1	2.1	4.2	4.2	4.2	4.2
	RPM	1075	1075	1075	1075	1075	1075	1075	1075	1075	1075
	MOTOR TYPE	PSC	PSC	PSC	PSC	PSC	PSC	PSC	PSC	PSC	PSC
TOTAL UNIT AMPS		4.5	4.5	6.0	6.0	6.0	6.0	9.0	9.0	9.0	9.0
FLUE CONNECTION SIZE, INCHES**		3	4	4	4	5	5	5	5	6	6
GAS CONNECTION, INCHES		1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	3/4	3/4

* Ratings shown are for elevations up to 2,000 feet. For elevations above 2,000 feet, ratings should be reduced at the rate of 4% for each 1,000 feet above sea level.

** Diameter of round pipe - adaptor furnished with heater.

DUHA UNIT DIMENSIONS

*NOTE - Two Spotnuts are furnished on DUHA-60, -90, -115, -145, -175, -200 models.
- Four spotnuts are furnished on DUHA-230, 290, 345, 400 models.

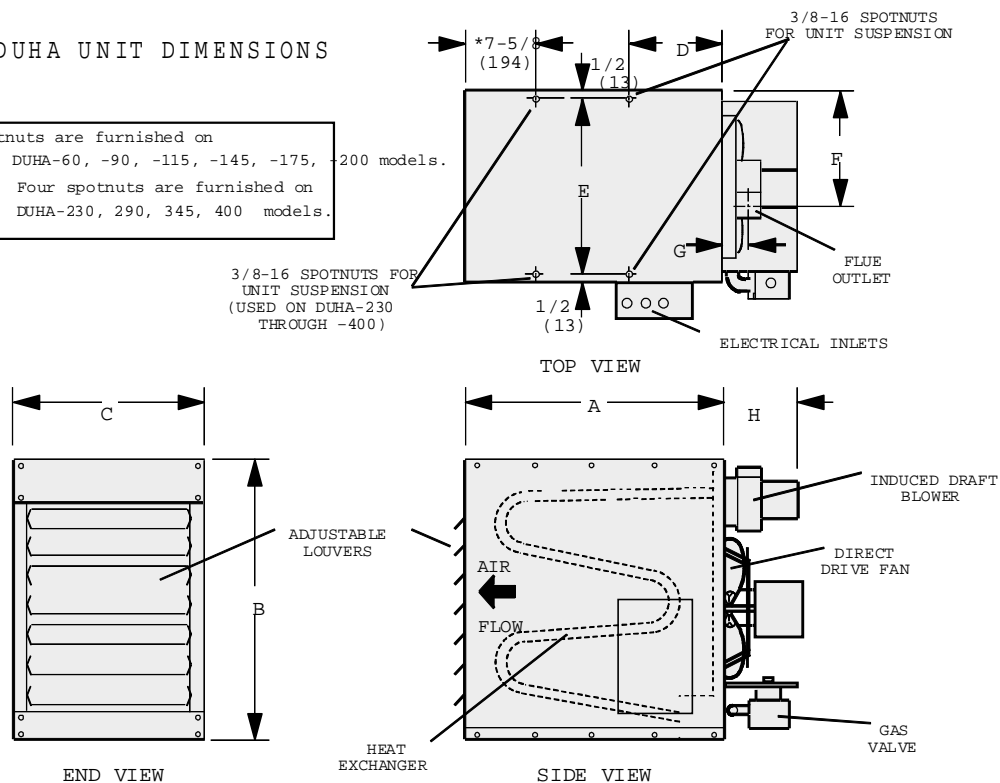

DIMENSIONAL DATA

MODEL NUMBER: DUHA-	A	B	C	D	E	F	G	H	MINIMUM CLEARANCES			
									TOP	SIDES	REAR	FLUE
60, 90	26	28-1/4	19-1/2	8-1/2	218-1/2	11-11/16	-13/16	7-7/8	6	6	18	6
115, 145	31-5/16	32-3/16	20-3/16	11-1/2	19-1/16	11-7/8	3-1/4	7-7/8	6	6	18	6
175, 200	31-5/16	32-3/16	23-1/8	11-1/2	22-1/16	13-1/4	3-1/4	7-7/8	6	6	18	6
230*	31-5/16	32-3/16	41-1/8	3-11/16	38-13/16	17-1/2	3-1/2	8-11/16	6	6	18	6
290*	31-5/16	32-3/16	41-1/8	3-11/16	38-13/16	17-1/2	3-1/2	8-11/16	6	6	18	6
345*	31-5/16	32-3/16	41-1/8	3-11/16	38-13/16	17-1/2	3-1/2	9-13/16	6	6	18	6
400*	31-5/16	32-3/16	41-1/8	3-11/16	38-13/16	22-1/8	3-1/2	9-13/16	6	6	18	6

NOTE: All dimensions are in inches. Provide 24-inch service clearance on electrical control box side and at rear of unit

* Unit contains dual fans.